

SuomiNet - Site Wireless Configuration


Article Number: 557 | Rating: Unrated | Last Updated: Thu, Dec 17, 2009 at 7:27 PM

SuomiNet - Site Wireless Configuration

Note - content is provided for historical continuity and may be out of date. The UNAVCO SuomiNet pages are not actively maintained, and up-to-date SuomiNet information should be obtained from UCAR's COSMIC program at:

www.cosmic.ucar.edu/suominet.html

Configuration 3 - SuomiNet site with radio modem link for the serial connection between the GPS receiver and the computer. In this configuration, only one serial link is used.

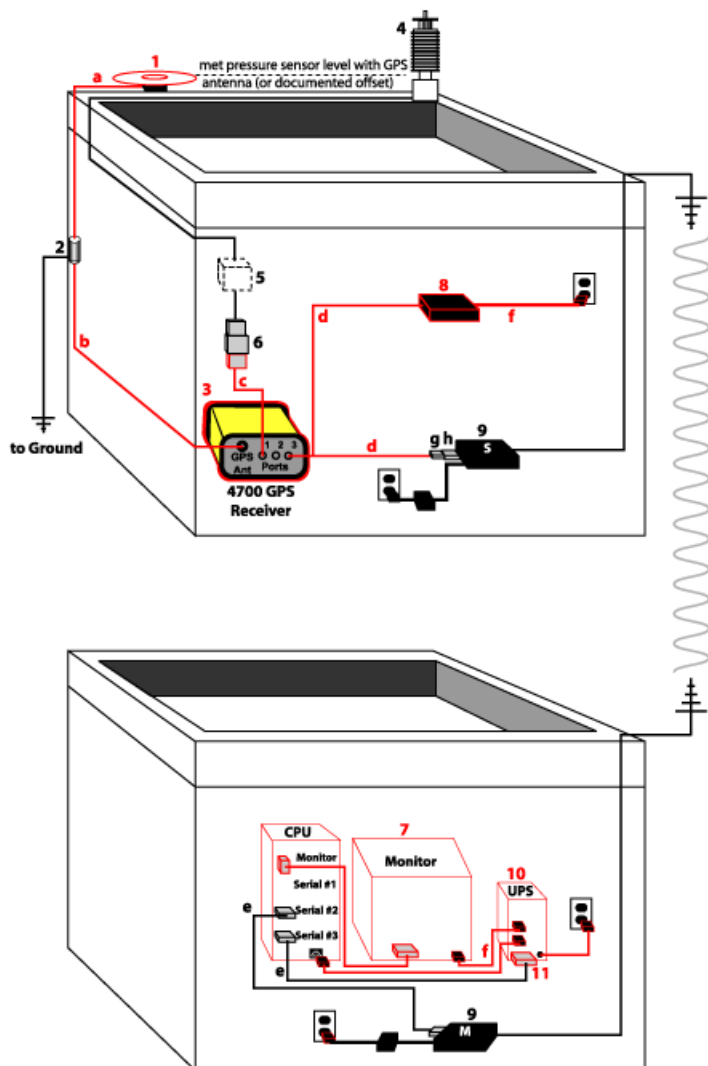

Configuration 3 Components:

1. Trimble Microcentered geodetic GPS antenna
2. Grounded lightning protector
3. Trimble 4700 GPS receiver
4. Meteorological package sensor
5. Meteorological package body (Vaisala only)
6. Serial surge protector
7. System computer
8. Trimble power supply p/n 30413

9. Wireless radio

10. Backup power supply

11. Gen power connector

Cables:

- a. GPS antenna cable - N male to N male, RG-214
- b. GPS antenna cable - N male to 1-shell Lemo Coaxial P male, RG-214
- c. GPS to meteorological package cable - 0-shell Lemo male to DB9 male
- d. Serial/power cable p/n 32345 - 7 p Lemo to DB9
- e. Serial cable - DB9 male to DB9 female
- f. Power cable
- g. DB9 null modem adapter
- h. DB9 male-male adapter

Posted by: **Beth Bartel** - Thu, Dec 17, 2009 at 7:27 PM. This article has been viewed 1746 times.

Online URL: <https://kb.unavco.org/kb/article/suominet-site-wireless-configuration-557.html>