


UNAVCO Trimble NetR9/R8 Campaign Kit

855 Henry Berglund January 6, 2017 [GNSS Campaigns](#) 996

These UNAVCO campaign kits are designed for use with Trimble NetR8/9 receivers and typically include a Zephyr Geodetic GPS or GNSS antenna. Bulkheads for solar and antenna cables allow for rapid deployment. The weather-tight case is suitable for many challenging environments. The system can be used with various solar configurations, monuments and antenna mounts. Maximum weight of the kit is approximately 50 lbs.

For help with deploying the kit, please check out the [quick setup guide](#).

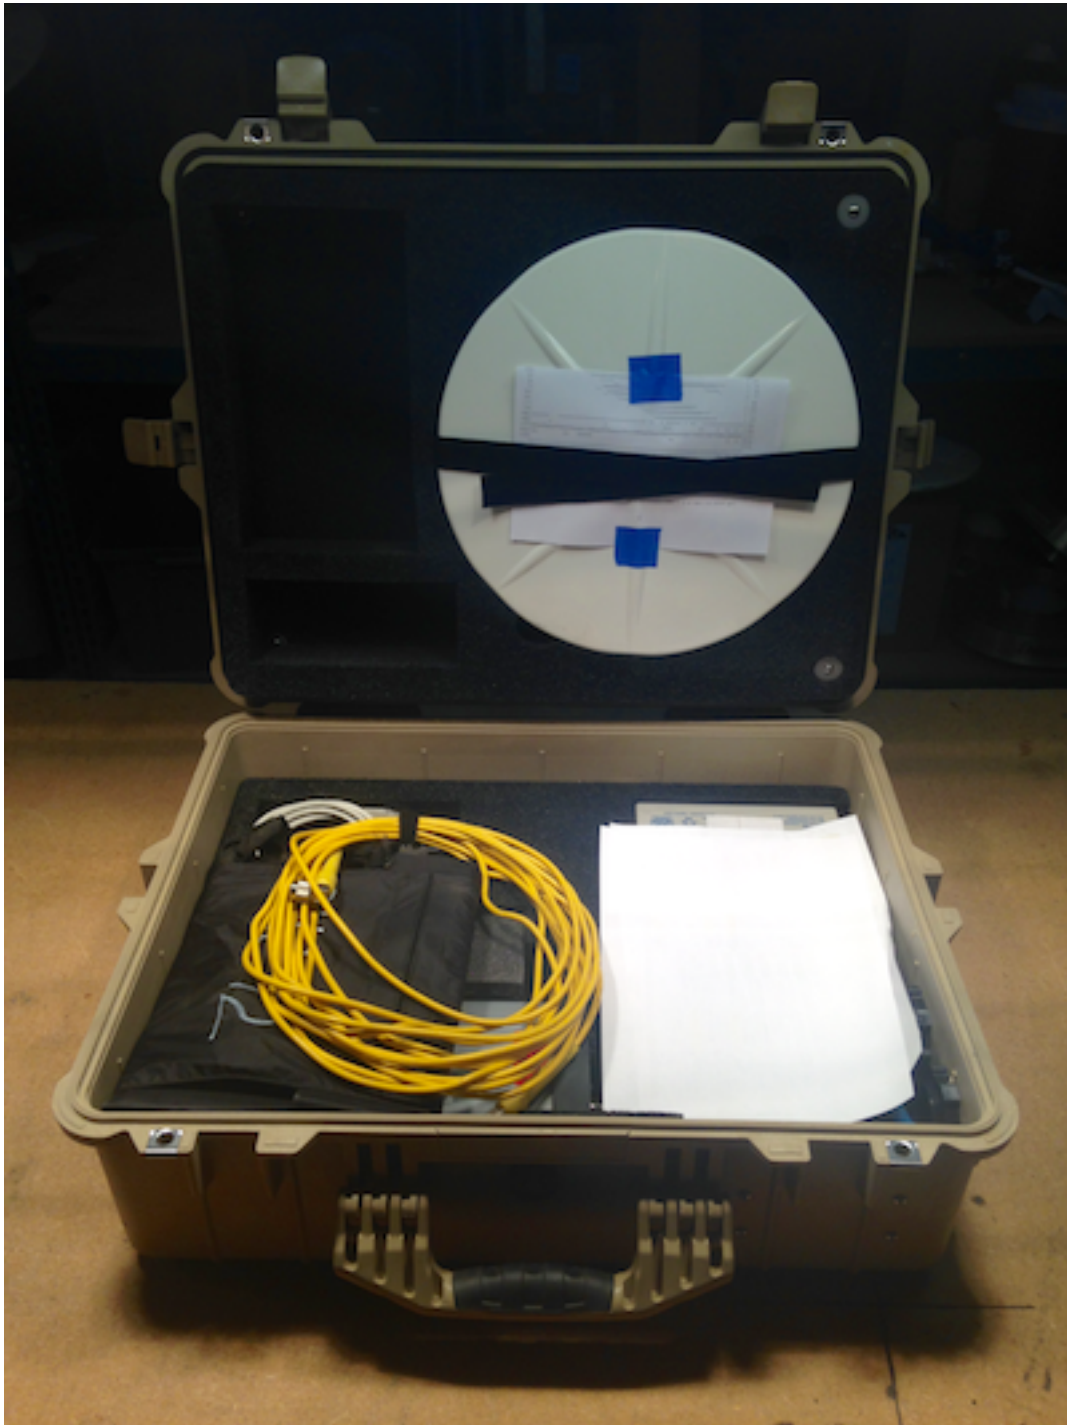



A Genasun GV-5 charge controller is attached to the inside of the Pelican case and is pre-wired to connect to the solar panel, batteries and power the GPS receiver.

Components



NetR9 Receiver - Records GPS data received via the antenna.

[Trimble NetR9 Resource Page](#)



NetR8 Receiver - Records GPS data received via the antenna.

[Trimble NetR8 Resource Page](#)



Zephyr Geodetic antenna, Trimble - Receives GPS data and transmits data to the receiver.

[UNAVCO Resources: GNSS Antennas](#)



antenna cable (10 m TNC-TNC) - Transmits the data from the antenna to the receiver. Connect the 90-degree connector (if there is one) to the antenna and the straight connector to the receiver or external side of bulkhead. Do not kink the cable; when coiling the cable, use an "over/under" winding method. Do not coil it around your hand and elbow.



antenna pigtail (0.5 m TNC-TNC) - Transmits the data from the TNC internal side of bulkhead to the receiver. It is best to not leave the cable connected during transport. Do not kink the cable.

[UNAVCO Resources: Cables and Connectors](#)



ethernet cable - Used to communicate with the NetR9 via a computer. Connect either end to the receiver and the other end to your computer. Note that both cross-over and straight Ethernet cables will work with the NetR9. See attachment at bottom of page for IP configuration guide.



AC power adapter - Used in conjunction with the power/download cable to connect the receiver to AC (outlet) power. Connect this cable to a power outlet and to the power/download cable.



DC power cable - Used to connect the receiver to the Genasun charge controller or the AC power adaptor. Also provides a DB-9 serial connection to the receiver.



18 amp hr battery (12 volts) - Will power the receiver and GPS antenna for approximately 2 days in optimal conditions. Battery life decreases significantly in cold weather. Do not allow conductive material (e.g. a piece of metal) to contact both terminals at the same time as this will short the battery.



solar regulator - Regulates the power from the solar panel to the batteries. See image above for wiring. The GV-5 model has very low parasitic draw and a max output of 65W.

[GV-5 Charge controller with MPPT by Genasun](#)



solar panel - Charges the battery when there is sufficient sunlight. Will maintain a 12+ volt charge on the battery. With 12 hours of daylight, the 18 amp hr battery and the solar panel should provide a sustainable power source for an extended period of time (weeks to years).

Additional Resources



[UNAVCO Resources: GNSS Station Monumentation](#)

Geodetic monuments and markers; this is principally a resource for permanent station monumentation but includes campaign options as well.



[UNAVCO Resources: GNSS Antenna Mounts](#)

An antenna mount is used to couple the GPS/GNSS antenna to the survey point. Different mounts are appropriate for different survey types.

Online URL: <https://kb.unavco.org/article/unavco-trimble-netr9-r8-campaign-kit-855.html>