
Trimble NetR9 - How to enable an external frequency source


779 Henry Berglund February 27, 2014 Trimble NetR9 3756

To fully enable an external frequency source:


1) Attach a 10MHz external frequency source to the BNC port (2) on the rear of the receiver.

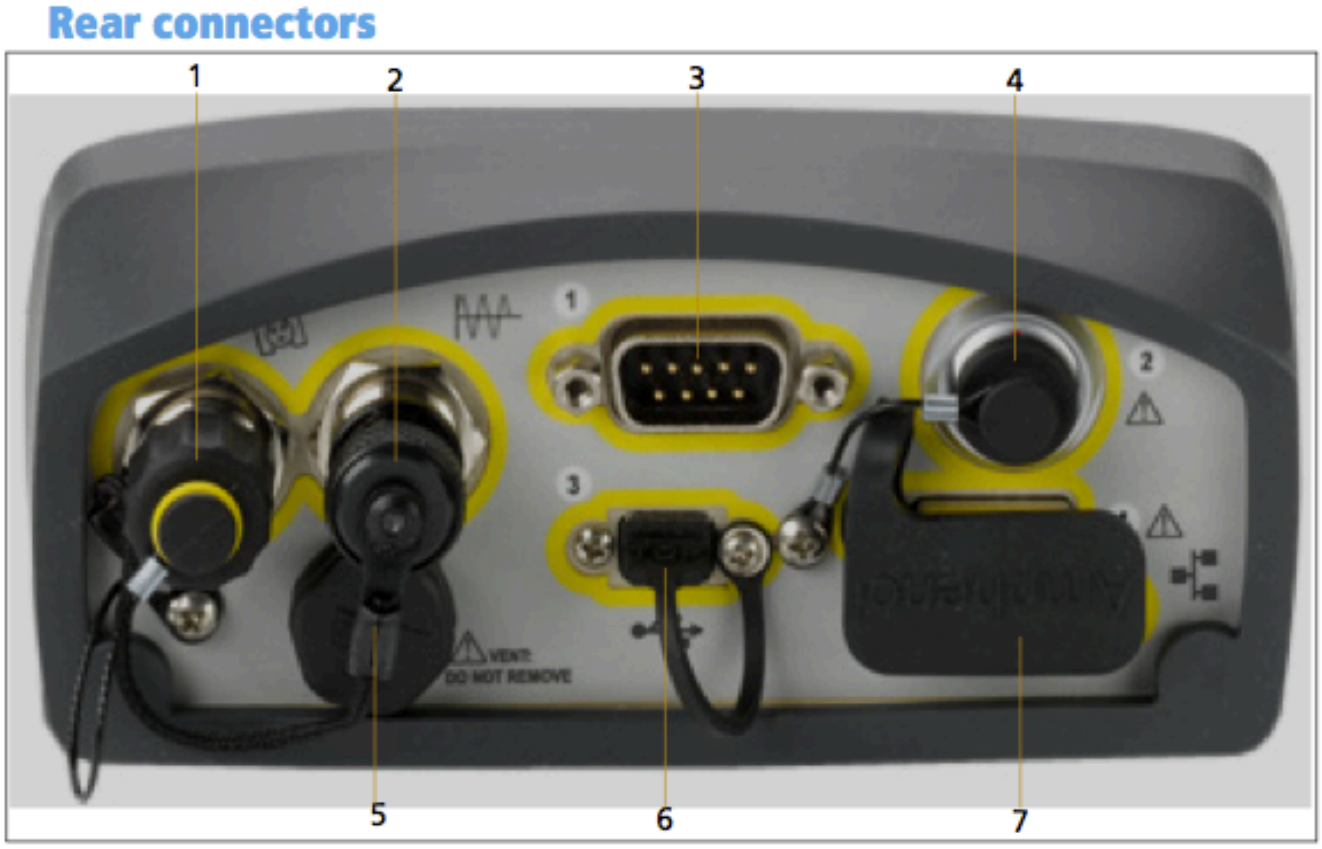

2) Disable clock steering (Receiver Configuration -> Tracking -> Clock Steering)

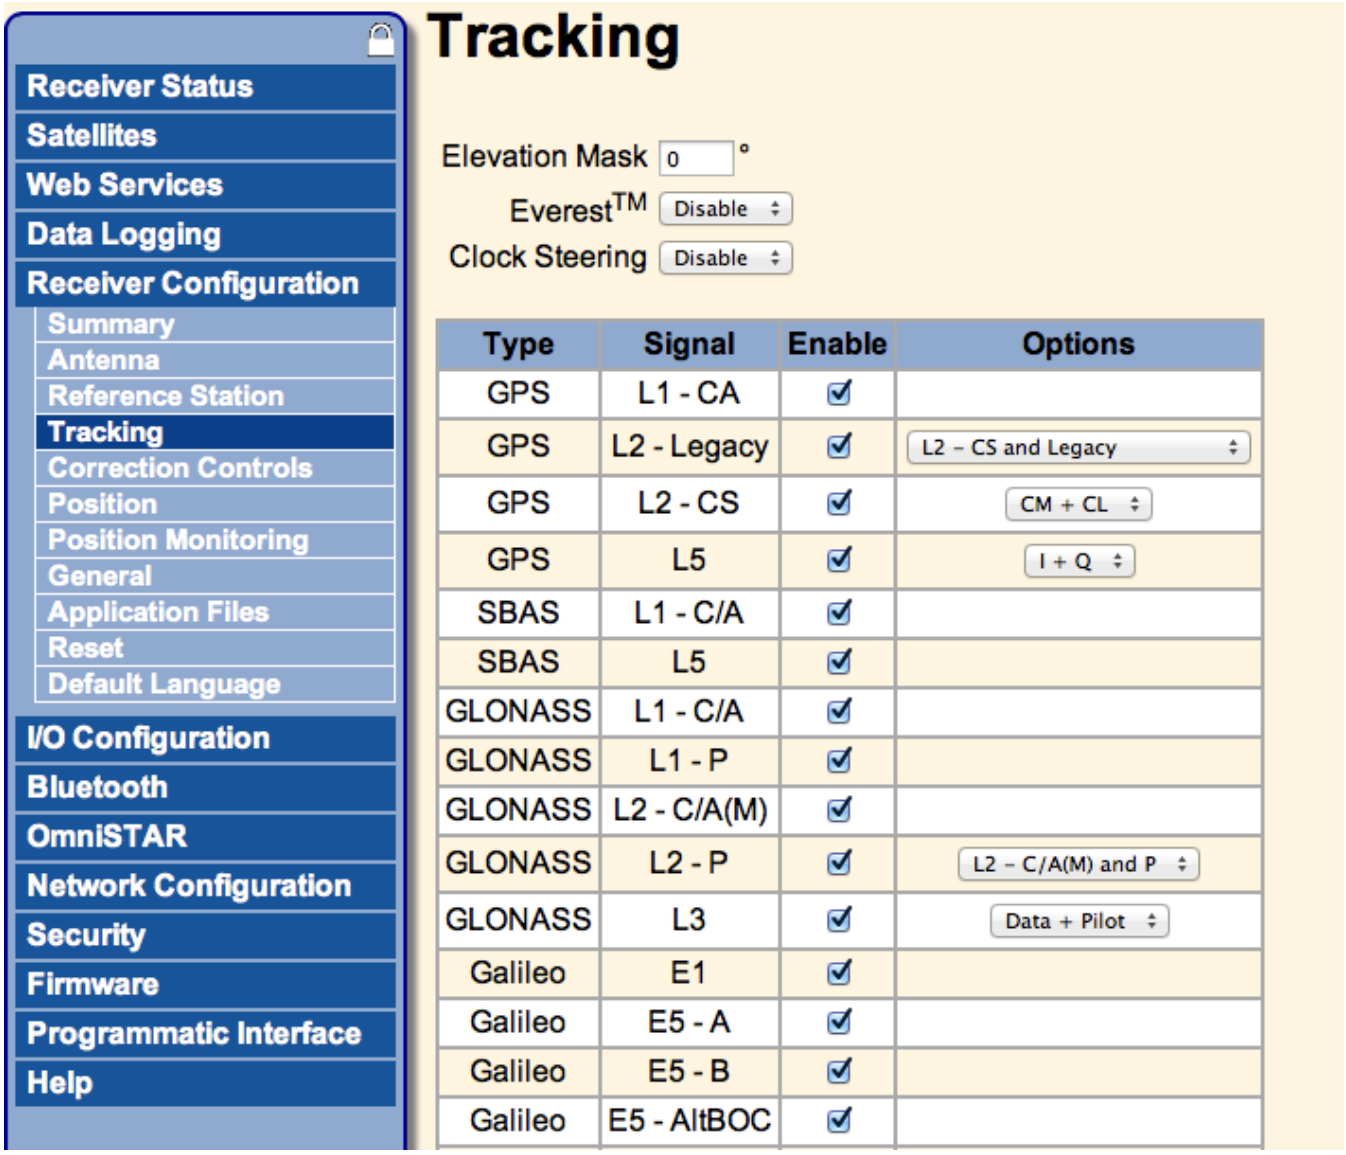

3) Enable External Frequency (Receiver Configuration -> General -> External Frequency)

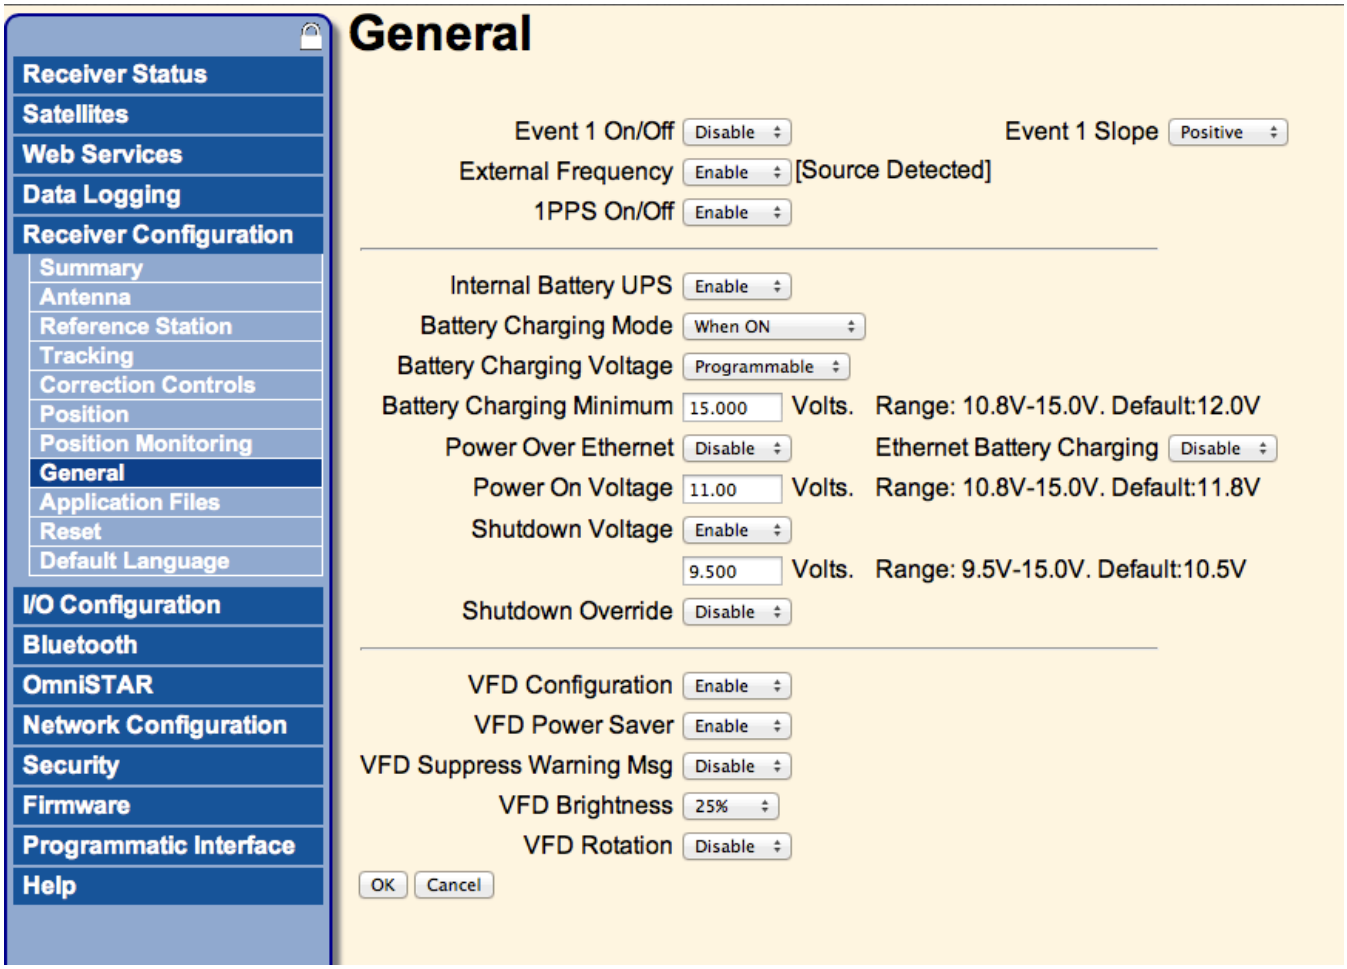

Online URL:
https://kb.unavco.org/article/trimble-netr9-how-to-enable-an-external-frequency-source-779.html